



## SPECIFICATIONS

### FAUCET DESCRIPTION

- The THERMOSTATIC faucet offers a SAFE and EASY operation for any bathtub or walk-in bathtub.
- Easy installation with only 3 holes to drill.
- Metal construction with Polished Chrome finish.
- Thermostatic faucet allowing the user to set a constant water temperature, both from the spout and the shower.
- 59" long shower hose.
- $\frac{3}{4}$ " connections to allow for maximum flow.
- Integrated anti-scalding feature.
- Made in Europe; Italian design.



### STANDARDS

- Complies with the following standards.
- ASME A112.18.1-2012/CSA B125.1-12.
- ASSE 1016-2017/ASME A112.1016-2017 / CSA B125.16-17.

### FLOW

- Designed to reach 14.3 gpm at 60 PSI on  $\frac{3}{4}$ " lines.
- Shower limited to 2.5 gpm.



### CRITICAL DIMENSIONS

#### DRILL HOLE SIZES:

Valve Body: 2"

Spout: 1 1/8"

Shower Head: 1 3/4"

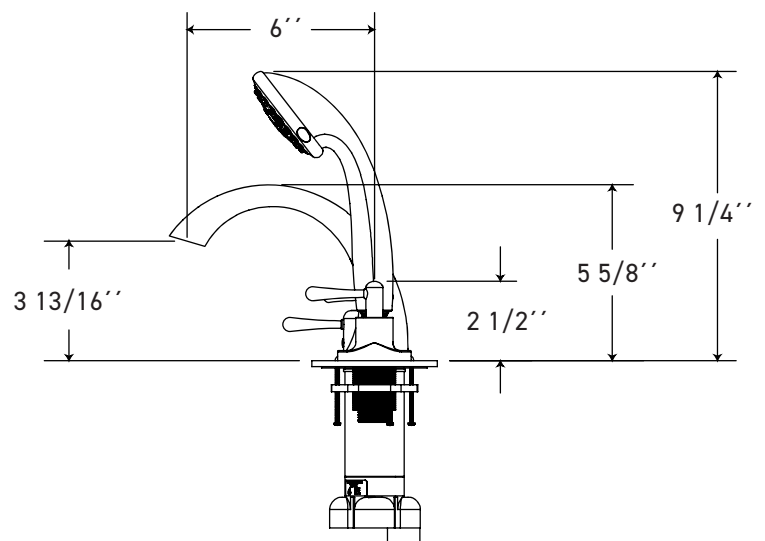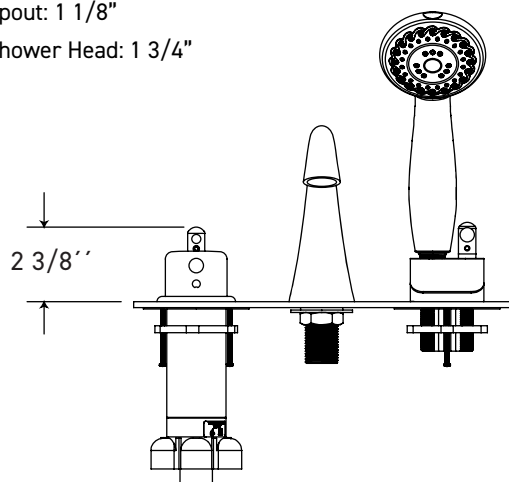

For more information  
800.288.7771

© 2018 Jetta Corporation.  
All rights reserved. REV 06/11/2018